

# 19" LCD Open frame SAW Touch Monitor ( the Water-proof and Compact Type )

KOT-0190U-SA4BCW



Shenzhen KeeTouch Electronic Co., Ltd.

<http://www.keetouch.cn/>

Keetouch's 19" compact open frame LCD touchmonitors have a long-lasting product cycle because the enclosure is controlled by Keetouch's specifications. Future panel improvements are therefore possible without external changes. The KOT-0190U-SA4BCW integrate with the Keetouch's SAW technology touchscreen.

## Features

- Bezel seal standard : NEMA3 and IEC IP65
- Long lasting product cycle-enclosure controlled by Keetouch specifications
- Future generation panels phased-in without external changes
- High quality panel with high brightness,high contrast ratio and broad viewing angle
- Multiple mounting options including VESA mount, horizontal or vertical bracket-mount
- Compact and slim profile for easy integration from side,top and bottom
- Keetouch's SAW technology on pure glass for the ultimate in image quality
- Finger or gloved hand operation
- USB touch interface port
- VGA input format
- Worldwide agency approvals

## Specification



<b>Model No.</b>	KOT-0190US-SA4BCW	
<b>Series</b>	OT , Water-proof and Compact	
<b>Display Type</b>	5:4Ratio 19 " Active matrix TFT-LCD	
<b>Active Area</b>	15.6 " (376mm)×11.85 " (301mm)	
<b>Monitor Dimensions</b>	<b>Width:</b> 415mm <b>Width with brackets:</b> 436 mm <b>Height:</b> 343mm <b>Height with brackets:</b> 364mm <b>Depth:</b> 51mm(not include lip):52mm(include lip)	
<b>Suggested Resolution</b>	1280×1024 @ 60Hz	
<b>Support Colors</b>	16.7M	
<b>Brightness(Typ.)</b>	Pure LCD Panel	300cd/m <sup>2</sup>
	With SAW Glass Sensor	275cd/m <sup>2</sup>
<b>Response Time(Typ.)</b>	6ms	
<b>Viewing Angle (Typ.at CR &gt; 10 )</b>	Horizontal(left/right)	80°/80°
	Vertical(up/down)	80°/80°
<b>Contrast Ratio(Typ.)</b>	800:1	
<b>Video Input</b>	Analog RGB	



<b>Frequency ( H/V )</b>	30 ~ 80KHz / 60 ~ 75Hz	
<b>Power Supply</b>	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz Output voltage/current: 12 volts at 4 amps max	
<b>Environment</b>	Operating Temp.	0 ~ 50°C
	Storage Temp.	-20 ~ 60°C
	Operating RH:	20% ~ 80%
	Storage RH:	10% ~ 90%
<b>MTBF</b>	50,000 Hours	
<b>LCD Back light Life(Typ.)</b>	50,000 Hours	
<b>Weight ( N.W/G.W )</b>	6Kg / 8Kg (Approx.)	
<b>Power Consumption</b>	50W Max.	
<b>Mount Interface</b>	1)VESA 75mm and 100mm 2)Mount bracket, horizontal or vertical (Standard mount brackets are supplied)	
<b>OSD Control</b>	Buttons	AUTO,+,POWER,-,MENU
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
<b>Touch screen Type</b>	Keetouch 19" SAW 4mm compact touch sensor	
<b>Touch System Interface</b>	Having USB interface	
<b>Touch Response time</b>	USB/8.4ms	
<b>Agency Approval</b>	CCC,ETL , FCC , CE , RoHS	
<b>Regular Warranty</b>	5 years for SAW Sensor; 3 years for controller; 1 year for LCD	

**NOTE:**The display SPEC. will change follow the relevant LCD panel brand and model

### Mechanical Dimensions

19" LCD OpenFrame SAW TM ( the Water-proof and Compact Type ) Spec. Rev.1.0

<http://www.keetouch.cn/>

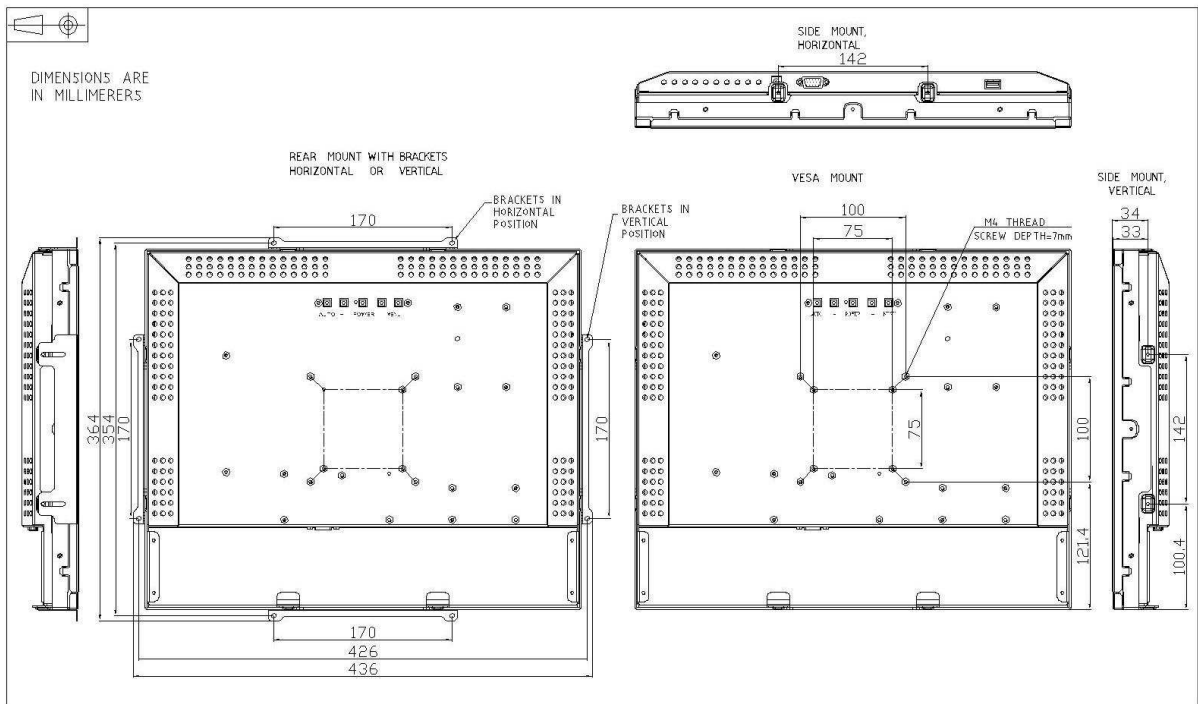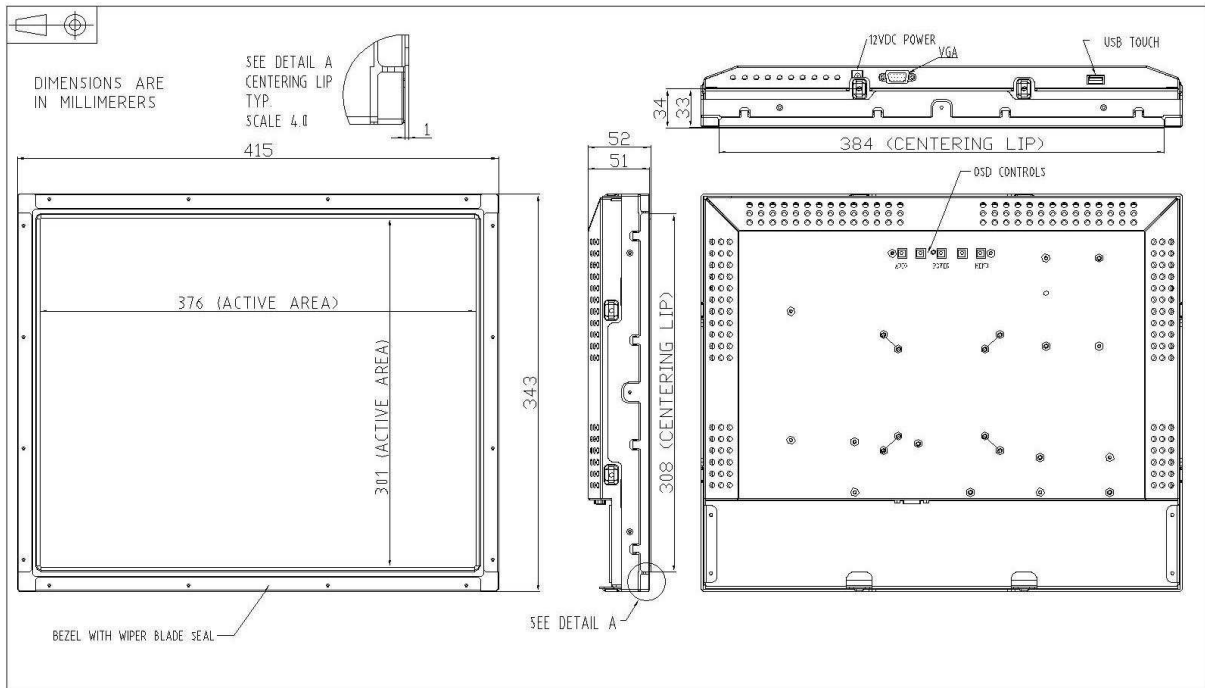

 Accessories

Touch Me, Touch Any

**Power Cable:** A North American power cable or an European power cable or a Chinese Standard power cable is included according to the end user's area.

**Power Supply Brick:**A power supply brick is included.

**Touch Cables:** USB touch cable

**L-brackets :** Four standard L-brackets are included.

### Typical Application

Gaming/Casino Systems  
Outdoor and indoor Kiosks  
Entertainment  
Transport and Ticketing  
Hospitality  
Banking  
Customized Solutions