



Model: KOT-0170US-SA6BW

**17" LCD Open Frame SAW Touch Monitor
(The Water-proof Type)**

© 1.0 2014/07 By KeeTouch

Features & Application

Features

- ◆ Future generation panels phased-in without external changes
- ◆ High quality panel with high brightness, high contrast ratio and broad viewing angle
- ◆ Multiple mounting options including horizontal bracket-mount, vertical bracket mount and VESA mount
- ◆ KeeTouch'S SAW technology on pure glass for the ultimate in image quality
- ◆ Dual USB/RS232 touch interface port
- ◆ VGA and DVI input video format
- ◆ Finger operation
- ◆ Worldwide agency approvals

Application

- ◆ Gaming/Casino Systems
- ◆ Outdoor and indoor Kiosks
- ◆ Entertainment
- ◆ Transport and Ticketing
- ◆ Hospitality
- ◆ Banking
- ◆ Customized Solutions

Accessories

- ◆ **Mount bracket:** A pair of standard mount bracket for horizontal or vertical mounting.
- ◆ **Power Supply Brick:** A power supply brick is included.
- ◆ **Touch/Video Cables:** USB touch cable, video cable and DVI cable are included.





Specification

Model No.	KOT-0170US-SA6BW	
Series	OT, Water-proof	
Display Type	5:4Ratio 17 " Active matrix TFT-LCD	
Active Area	337.92x270.34(mm)	
Monitor Dimensions	Width: 391mm Height: 323mm Depth: 54.5mm	
Suggested Resolution	1280x1024 (SVGA)	
Support Colors	16.7M	
Brightness(Typ.)	Pure LCD Panel	250cd/m ²
	With SAW Glass sensor	220cd/m ²
Response Time(Typ.)	30ms	
Viewing Angle (Typ.at CR>10)	Horizontal(left/right)	75°/85°
	Vertical(up/down)	70°/80°
Contrast Ratio(Typ.)	1000:1	
Video Input	VGA and DVI	
Frequency (H/V)	30~80KHz / 60~75Hz	
Power Supply	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz	
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Operating RH:	20%~80%
	Storage RH:	10%~90%
MTBF	30,000 Hours	
LED Back light Life(Typ.)	30,000 Hours	
Out package dimensions	466(L)*185(W)*403(H)MM (2pcs in one package)	
Power Consumption	14.12W Max.	
Standby power consumption	1.22W	
Mount Interface	Mount bracket, horizontal or vertical and VESA mount (Standard mount brackets are supplied)	
OSD Control	Buttons	AUTO,+,POWER,-,MENU
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
Touch screen Type	17" SAW touch screen sensor	
Touch System Interface	Having USB and RS232 interface	
Touch Response time	USB: 8.4ms	
Agency Approval	CCC,ETL,FCC,CE,RoHS	
Regular Warranty	1 year	

NOTE:The display SPEC. will change follow the relevant LCD panel brand and model

Mechanical Dimensions

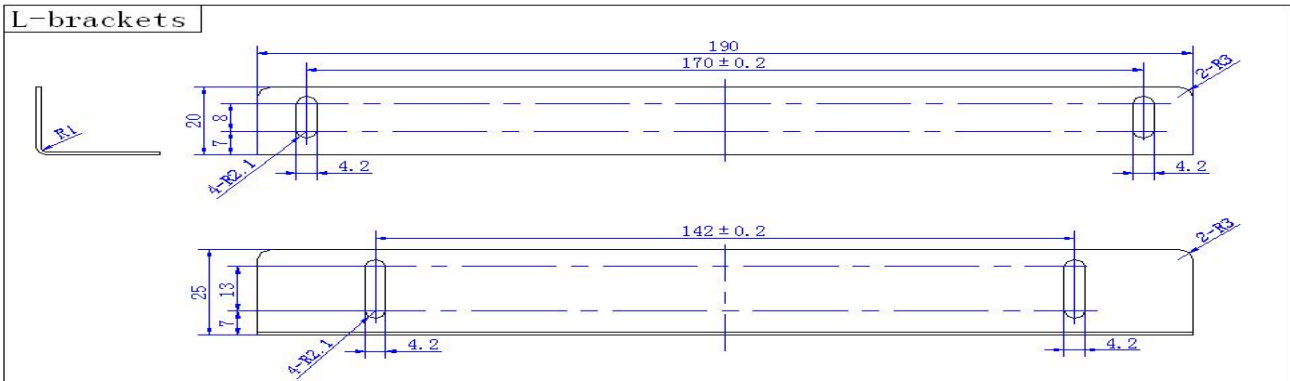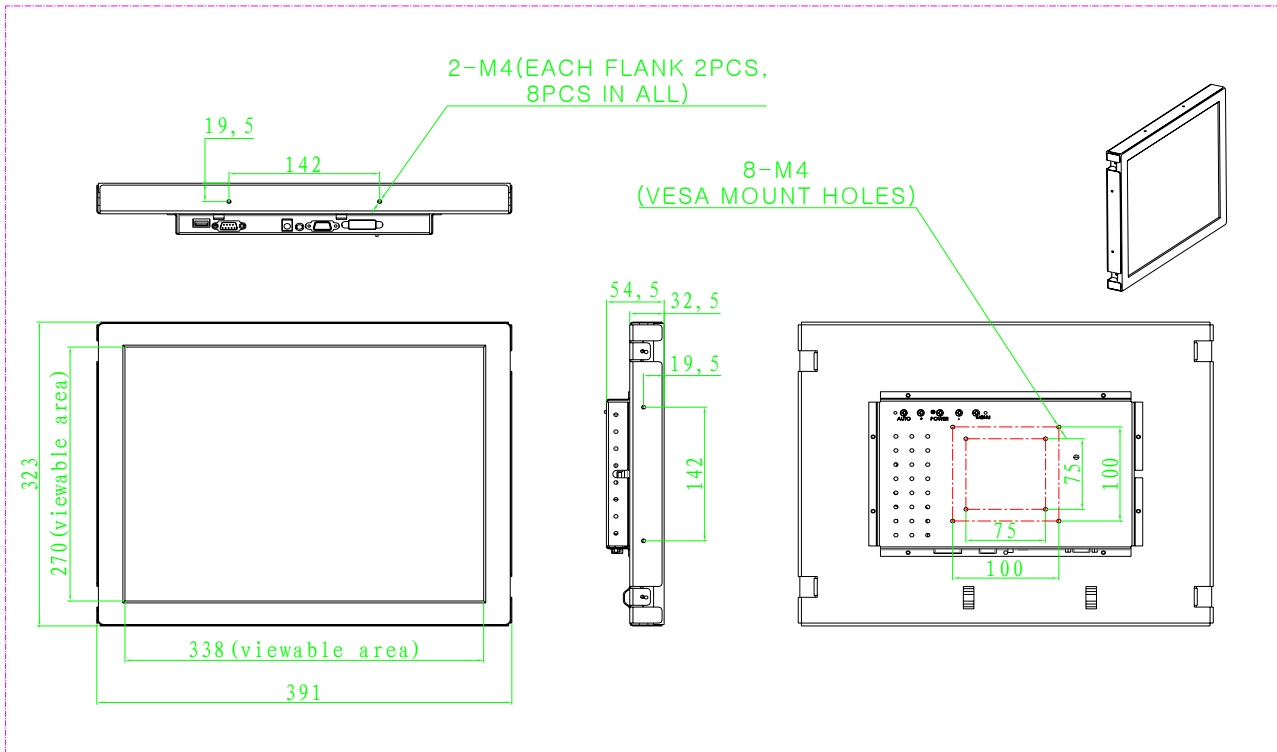

Record of revision

Version & Date	Old description	New description
1.0 2014/06/27	First Edition for Customer	