



Model: KOT-0215U-CA2P

21.5" LCD Open Frame PCAP Multi-Touch Monitor

© 1.0 2014/07 By Keetouch

Features & Application

Features

- ◆ Keetouch's Projected Capacitive technology on pure glass for the ultimate in image quality.
- ◆ Long lasting product cycle-enclosure controlled by Keetouch specifications.
- ◆ Future generation panels phased-in without external changes.
- ◆ High quality panel with high brightness, high contrast ratio and broad viewing angle.
- ◆ Multiple mounting options including horizontal bracket mount, vertical bracket mount and VESA mount.
- ◆ Easy integration from side.
- ◆ Finger or Capacitive pen operation.
- ◆ USB touch interface port.
- ◆ VGA 、 DVI、 HDMI input video format.
- ◆ Worldwide agency approvals.

Application

- ◆ Gaming/Casino Systems
- ◆ Outdoor and indoor Kiosks
- ◆ Entertainment
- ◆ Transport and Ticketing
- ◆ Hospitality
- ◆ Banking

Accessories

- ◆ Power Cable: A North American power cable or an European power cable or a Chinese Standard power cable is included according to the end user's area.
- ◆ Power Supply Brick: A power supply brick is included.
- ◆ Touch/Video Cables: USB touch cable, VGA or DVI or HDMI cable is Included.


Specification


Model No.	KOT-0215U-CA2P		
Touch screen Type	Projected Capacitive touch sensor, 10 points in win7		
Bezel Color	Black		
Diagonal Size	21.5" diagonal		
Aspect Ratio	16:9		
Dimensions	20.3 " x12.2 " x1.5 " (516mmx311mmx38.5mm)max		
Active Display Area	18.77" x10.56"(476.64mmx268.11mm)		
Suggested Resolution	1920x1080@60Hz		
LCD Technology	Active matrix TFT LCD with LED backlighting		
Support Colors	16.7M		
Brightness(Typ.)	LCD Panel: 250 nits ; With PCAP:215 nits		
Response Time(Typ.)	5ms		
Viewing Angle (Typ.at CR>10)	Horizontal(left/right)	89°/89° (85°/85°)	
	Vertical(up/down)	89°/89° (80°/80°)	
Contrast Ratio(Typ.)	1000:1		
Video Input	VGA ,DVI,HDMI		
Power Supply	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz		
Environment	Operating Temp.	0~50°C	
	Storage Temp.	-10~60°C	
	Operating RH:	20%~80%	
	Storage RH:	10%~90%	
MTBF	30,000 Hours demonstrated		
Weight (Approx.)	Unpackaged: 4.8kg; Packaged: 6.9kg		
Mount Options:	VESA 4-hole 100mm mounting interface on rear of unit 2-hole mounting interface on all 4 sides		
On-Screen Display (OSD)	Accessible through switches on the unit's tethered OSD Control box. Controls: Menu,Up,Down,Select;Settings: Brightness,Contrast,Clock,Phase,H-position,V-position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD Timeout, OSD Language, OSD H-Position, OSD;V-Position, Recall Defaults, Video Source;Languages:English,French,Italian,German,Spanish,Simplified Chinese, Traditional Chinese, Japanese; Lockouts: OSD, Power		
Agency Approval	CCC,ETL,FCC,CE,RoHS		
Regular Warranty	1 year		

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model



A Professional Touch Products Manufacturer!

Mechanical Dimensions

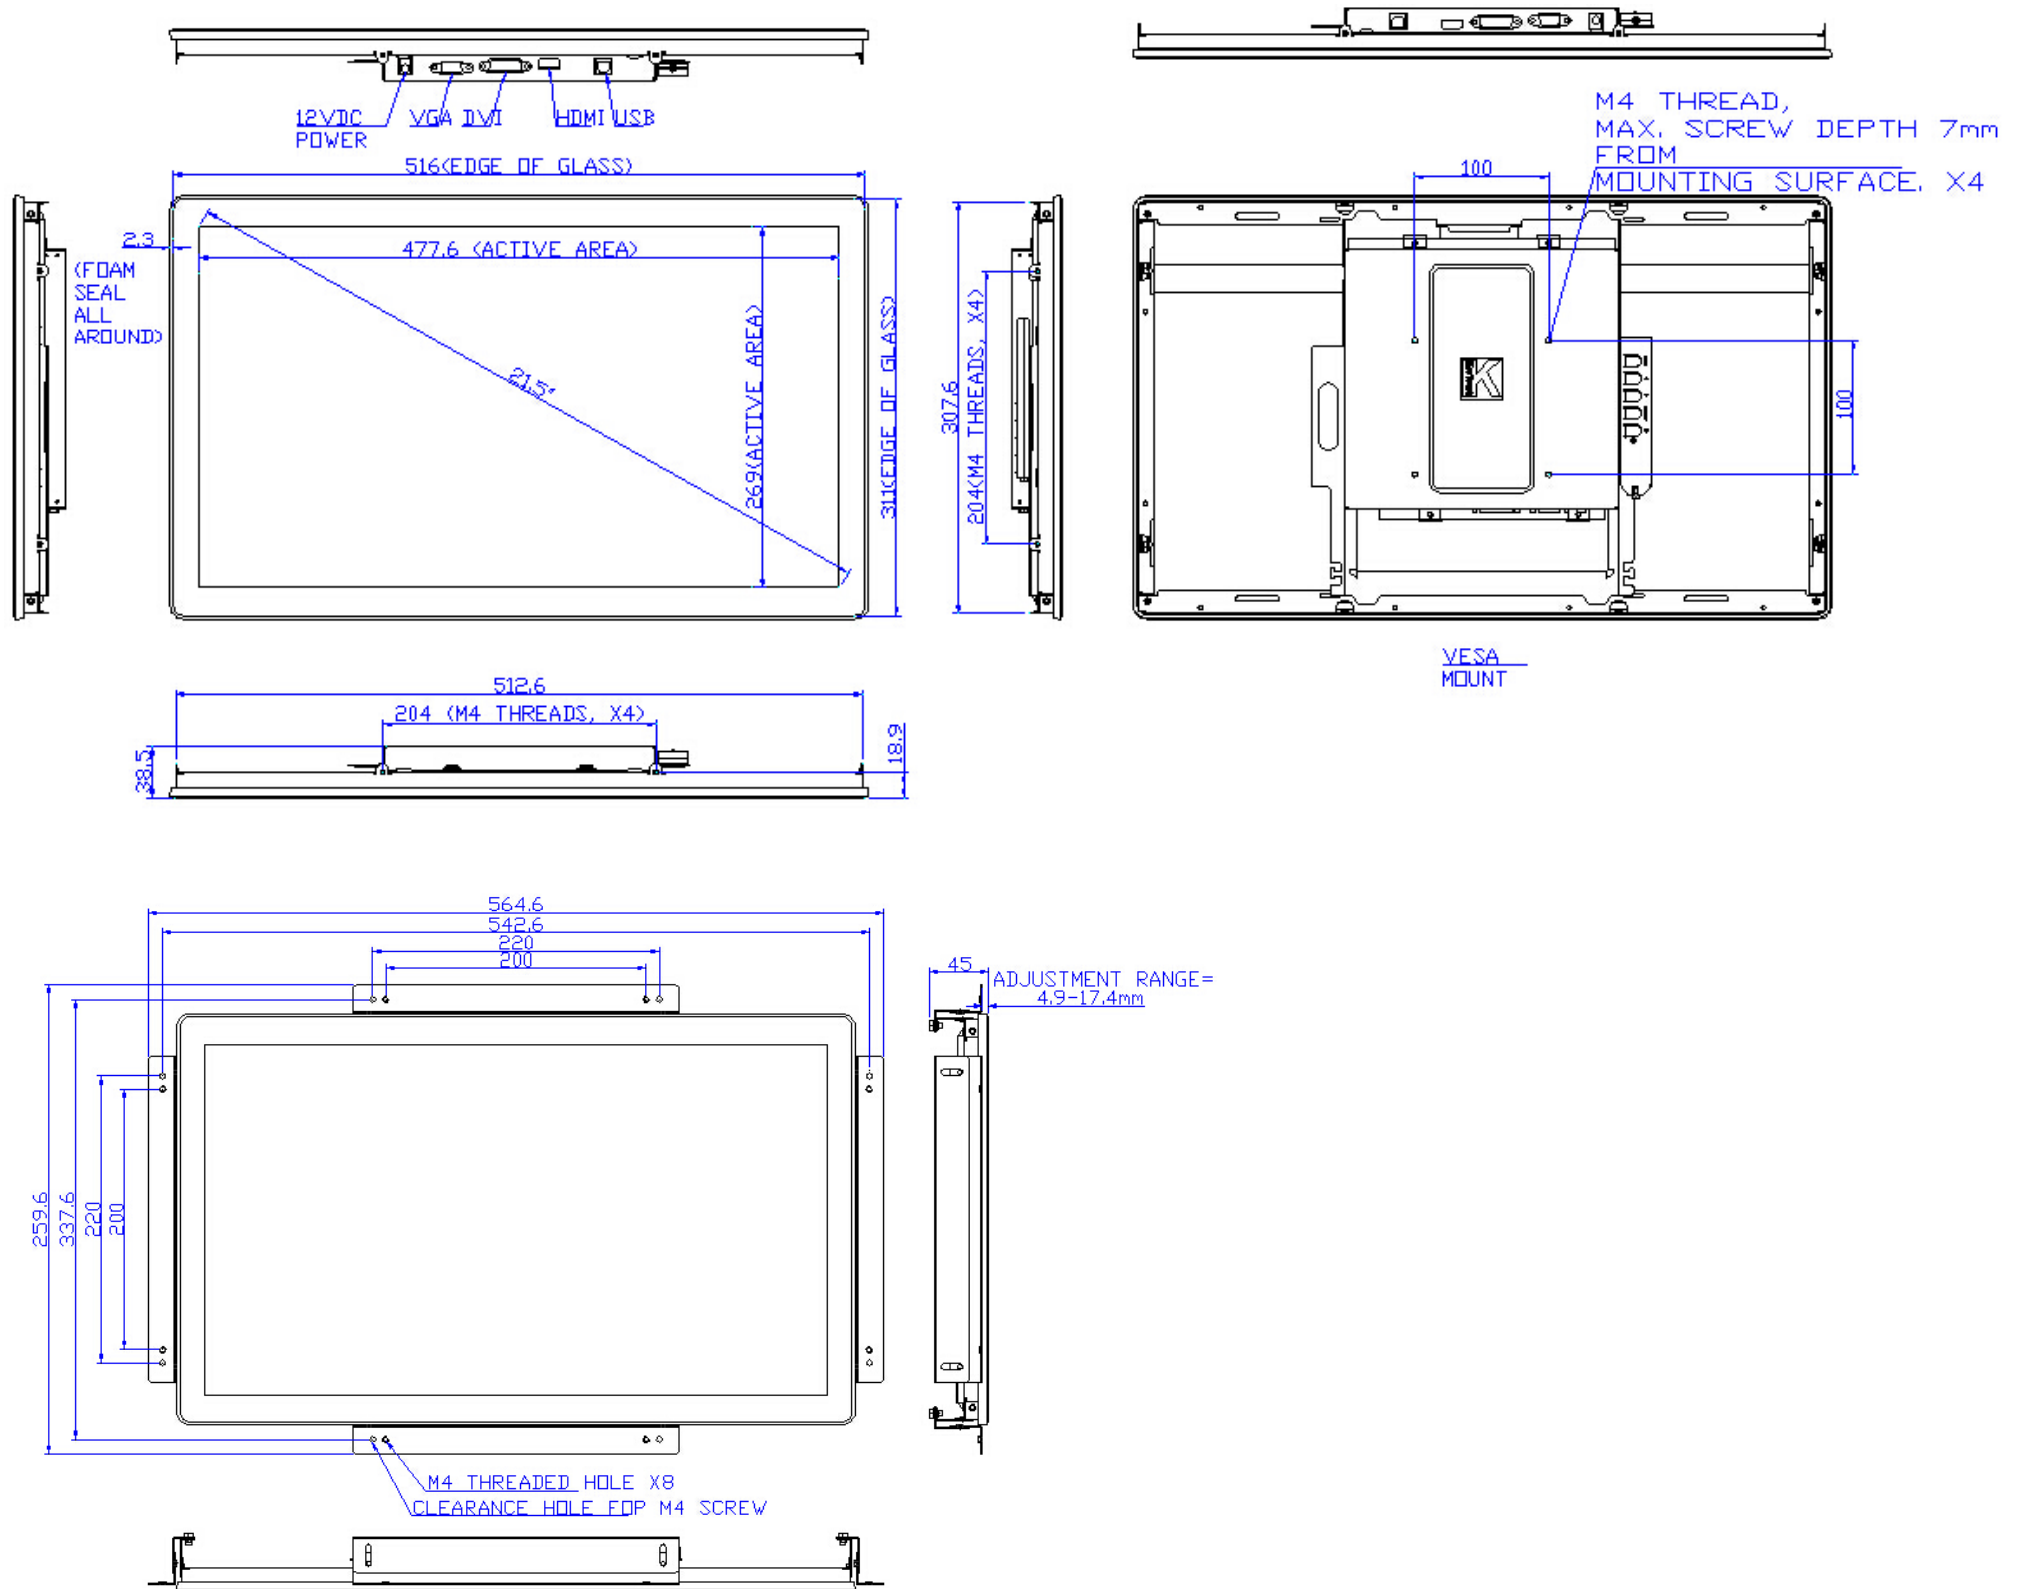

Record of revision

Version & Date	Old description	New description
1.0 2014/06/27	First Edition for Customer	

ADD: 1~4 Floor, BLD 9, Luck-King Industry Park Gongyedong Road, Longhua District, Shenzhen 518109, P.R.China

Tel: +86-755-82599797

Fax: +86-755-82599968

E-mail: sales@keetouch.com

www.keetouch.com



A Professional Touch Products Manufacturer!

KeeTouch reserves the right to change or update, without notice, any information contained herein; to change, without no construction, materials, processing or