



NP-2411D-4 / NP-3411D-4

New

NP-2411D

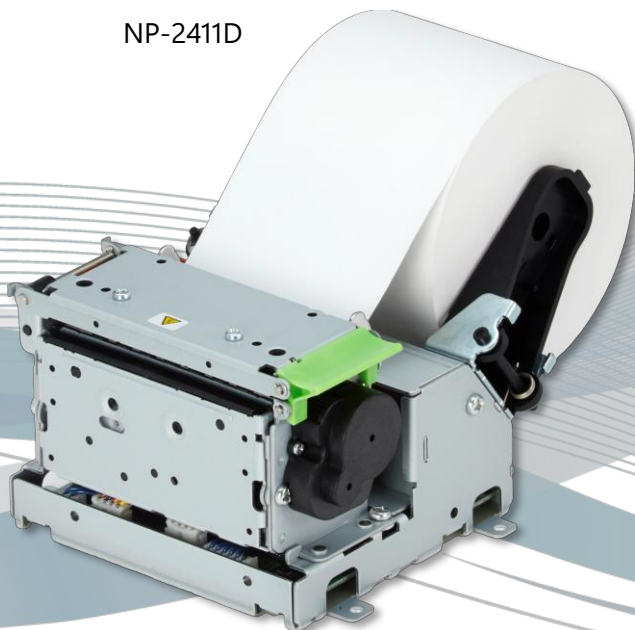

NP-3411D

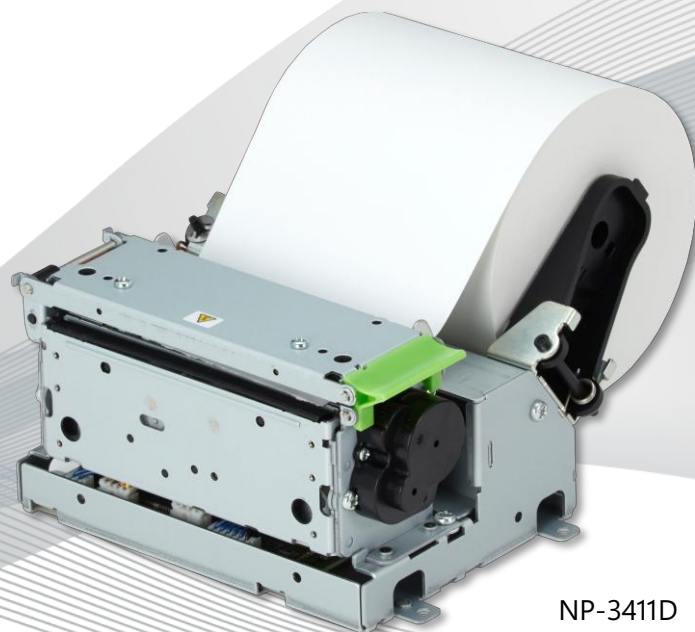

▶ CHARACTERISTIC

2inch

3inch

DC24V

USB

Serial

▶ SPECIFICATION

| Model name | NP-2411D-4 | NP-3411D-4 |
|--------------------------------|---|--|
| Printing method | Direct line thermal dot | |
| Print speed | 250 mm/sec. (at max.) | |
| Dots density | 8 dots/mm (203 dpi) | |
| Gray scale printing | 32 gray scale | |
| Number of dots/line | 448 dots | 640 dots |
| Print width | 56 mm (at max.) | 80 mm (at max.) |
| Paper width | 58 mm, 60 mm | 76 mm, 80 mm |
| Paper thickness | 56 to 155 μm | |
| Paper diameter | 83 mm* | |
| Reliability | 200 million pulse, 200km, 2 million cuts | |
| Operating Temperature/Humidity | -20 to 60°C / 10 to 85% | |
| Character | International, English, Greek, Polish, Russian, Scandinavian, Turkish, Arabic, Hebrew, Thai, Chinese, Taiwanese, Korean, Japanese | |
| Barcode/QRcode | UPC-A, UPC-E, EAN-13, EAN-8, CODE39, ITF, CODABAR, CODE128, CODE93, ISBN, Industrial 2 of 5, Matrix 2 of 5, NEC Matrix, Customer Barcode, MSI Code, EAN-128(GS1-128), GS1 DataBar Omnidirectional, GS1 DataBar Truncated, GS1 DataBar Limited, GS1 DataBar Expanded / QR Code (model2), Split QR codes (model2), Micro QR code, PDF417, Micro PDF417, MaxiCode, DataMatrix, GS1 DataBar Stacked, GS1 DataBar Stacked Omnidirectional, GS1 DataBar Expanded Stacked, EAN-8 Composite, EAN13 Composite, UPC-A Composite, UPC-E Composite, GS1-128 Composite, GS1 DataBar Omnidirectional Composite, GS1 DataBar Truncated Composite, GS1 DataBar Limited Composite, GS1 DataBar Expanded Composite, GS1 DataBar Stacked Composite, GS1 DataBar Stacked Omnidirectional Composite, GS1 DataBar Expanded Stacked Composite, GS1 QR code, GS1 Aztec Code, GS1 DataMatrix | |
| Interface | USB 2.0 full speed and serial (RS-232C) | |
| Cutter | Full cut and partial cut by the command | |
| Operating voltage | DC 24 V | |
| External dimensions | 103.6 ^(W) x 123.5 ^(D) x 77.3 ^(H) mm | 124.6 ^(W) x 123.5 ^(D) x 77.3 ^(H) mm |

*When using the paper holder option, it supports up to O.D.250 mm paper roll.