
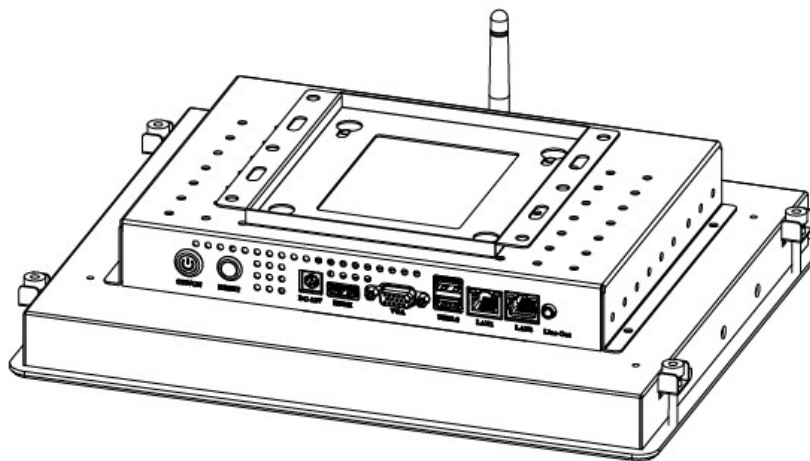


SKT-121-CJA-B412-(i3 10th GEN)-AG

12.1 INCH PCAP TOUCH PANEL PC

12.1 inch PCAP Touch screen 10 Touch Point , Front IP65 & Water proof & Antiglare
Resolution 1024*768, Brightness 450cd/m2
Windows System, Intel I3 10th Generation, RAM 8GB, 128GB SSD
Full aluminum frame. LAN+LAN, USB*4, COM*1, Wifi, Bluetooth.
OPERATING SYSTEM NOT INCLUDED

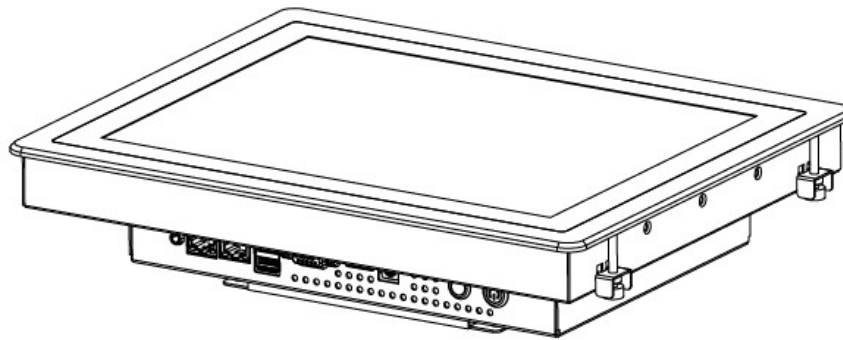

- 12.1" PCAP TOUCHSCREEN MULTI 10 POINTS TOUCH WITH ANTIGLARE
- WITH HIGH-PERFORMANCE COMPUTING AND GRAPHICS (I3 10TH GEN)
- SURFACE STRUCTURE WATERPROOF CAN MEET IP65 STANDARD
- WITH 3MM TEMPERED GLASS VANDAL-PROOF STABLE AND POWER
- TOUCH SUPPORT LINUX / ANDROID / WINDOWS OPERATION
- DUAL LAN, FOUR USB, ONE COM PORT, VGA, HDMI
- FULL ALUMINUM FRAME

Model Number	SKT-121-CJA-B412-(i3 10 th GEN)	
Total parameter	Diagonal Size	12.1" a-Si TFT-LCD, LCM
	Aspect Ratio	4:03
	Enclosure Color	Black
	Speakers	Two 5W internal speakers (Option)
Mechanical	Unit Size (WxHxD mm)	317×258×66.4mm
	VESA Holes (mm)	100×100mm
Computer	CPU	Comet Lake CPU I3-10110U
	Graphics	Integrated Intel UHD Graphics Ultra-Core Graphics Card
	Memory (RAM)	8GB
	Storage	128 GB SSD
	USB	2 x USB 3.0
		2 x USB 2.0
	LAN 1	Intel WGI210AT LAN Chip Supports Wake-on-LAN Support PXE boot function
	LAN 2	
	Mini- PCIE Slot	Support WIFI
		Support optional 3G/4G
		Support optional GPS
		Bluetooth module included
		Support MSATA
		Wi-Fi
	4G Module	Optional HUAWEI 4G PCI-E Module (Option 4G, No WIFI)
BIOS	AMI BIOS Support power-on Support timed power-on Support Remote power-on/off device intelligent identification	
Languages	Windows 10 - Language groups	
OS (NOT INCLUDED)	Linux (optipn)	
	Windows (option)	
LCD Panel	Active Area(mm)	248.6(W)×187(H) mm
	Resolution	1024×768
	Dot Pitch(mm)	0.1025×0.3075 mm
	Viewing angle(Typ.)(CR≥10)	80/80/65/75 (Typ.)(CR≥10)
	Contrast (Typ.) (TM)	800:1 (Typ.) (TM)
	Brightness (typical)	LCD Panel: 450 cd/m ² (Typ.)
		PCAP: 400 cd/m ² (Typ.)
	Response Time (Typ.)(Tr/Td)	30 (Typ.)(Tr+Td)
	Support Color	262K/16.7M 55% NTSC
Backlight MTBF(hr)	WLED , 30K hours	
Touchscreen	Type	PCAP Touch, Capacitive Touch Screen
	Glass Cover Treatment	Antiglare
	Multi touch	10 Touch Points
Power	Power Consumption (W)	DC 12V /10A ,DC head 5.0x2.5MM
	Input Voltage	100-240 VAC, 50-60 Hz
	MTBF	50000 hr at 25°C
Environment	Operating Temp.	-20~60°C
	Storage Temp.	-20~70°C
	Operating RH:	20%~80%
	Storage RH:	10%~90%
Accessories	Included	1 x Power Adapter, 1 x Power Cable, Rear Mount brackets
	Optional	Wall Mount, Floor Stand/Trolley, Ceiling Mount, Table Stand
Warranty	Warranty Period	1 Year Free Warranty
	Technical Support	Lifetime