


SKT-150-CBF03-PSEL3

15" Industrial Open-Frame Touch Monitor

Brightness 300cd/m2, Resolution 1024*768, VGA/DVI/HDMI, USB Touch, 12V DC

Projected Capacitive Touch Panel 3mm vandal proof

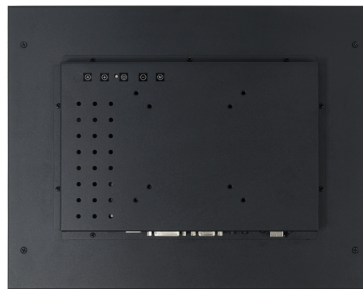


Specification

Model Number	SKT-150-CBF03-PSEL3	
Total parameter	Diagonal Size	15.0" a-Si TFT-LCD, LCM
	Aspect Ratio	4:3
	Enclosure Color	Black
	Video Input	VGA/DVI/HDMI
	Speakers	Optional
Mechanical	Monitor Dimensions	347x271x51mm
	VESA Holes (mm)	75x75,100x100
LCD Panel	Active Area(mm)	304.14(W)×228.14(H) mm
	Resolution	1024(RGB)×768 , XGA
	Dot Pitch(mm)	0.098×0.294 mm
	Viewing angle(Typ.)(CR≥10)	80/80/70/70 (Typ.)(CR≥10)
	Contrast (Typ.)(TM)	700:1 (Typ.)(TM)
	Brightness (typical)	LCD Panel: 300 nits PCAP: 260 nits
	Response Time (Typ.)(Tr/Td)	5/11 (Typ.)(Tr/Td)
	Support Color	262K/16.2M 60% NTSC
	Backlight MTBF(hr)	WLED , 50K hours , With LED Driver
Touchscreen	Touch Technology	PCAP Touch, Capacitive Touch Screen
	Input Methods	Finger
		Gloved hand
		Passive stylus
	Number of Touches	Multi Touch (10)
	Glass Thickness	3mm Tempered Glass
	Light Transmission	90%
	Response Time	8 ms
	Life Span	Over 50 million touches in one location
	Positional Accuracy	± 1.5mm
	Touch interface	USB
		RS232(Optional)
	Operating System	Windows XP
		Windows 7
Windows 8		
Linux		
Android		
Power	Power Consumption (W)	DC 12V /4A ,DC head 5.0x2.5MM
	Input Voltage	100-240 VAC, 50-60 Hz
	MTBF	50000 hr at 25°C
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Operating RH:	20%~80%

	Storage RH:	10%~90%
Accessories	Packing List	1 x Touch Monitor 1 x Power Switching Adapter 1 x Power Cable 1 x USB Cable 1 x HDMI Cable Rear Mount brackets
Warranty	Warranty Period Technical Support	1 Year Free Warranty Lifetime

Drawing

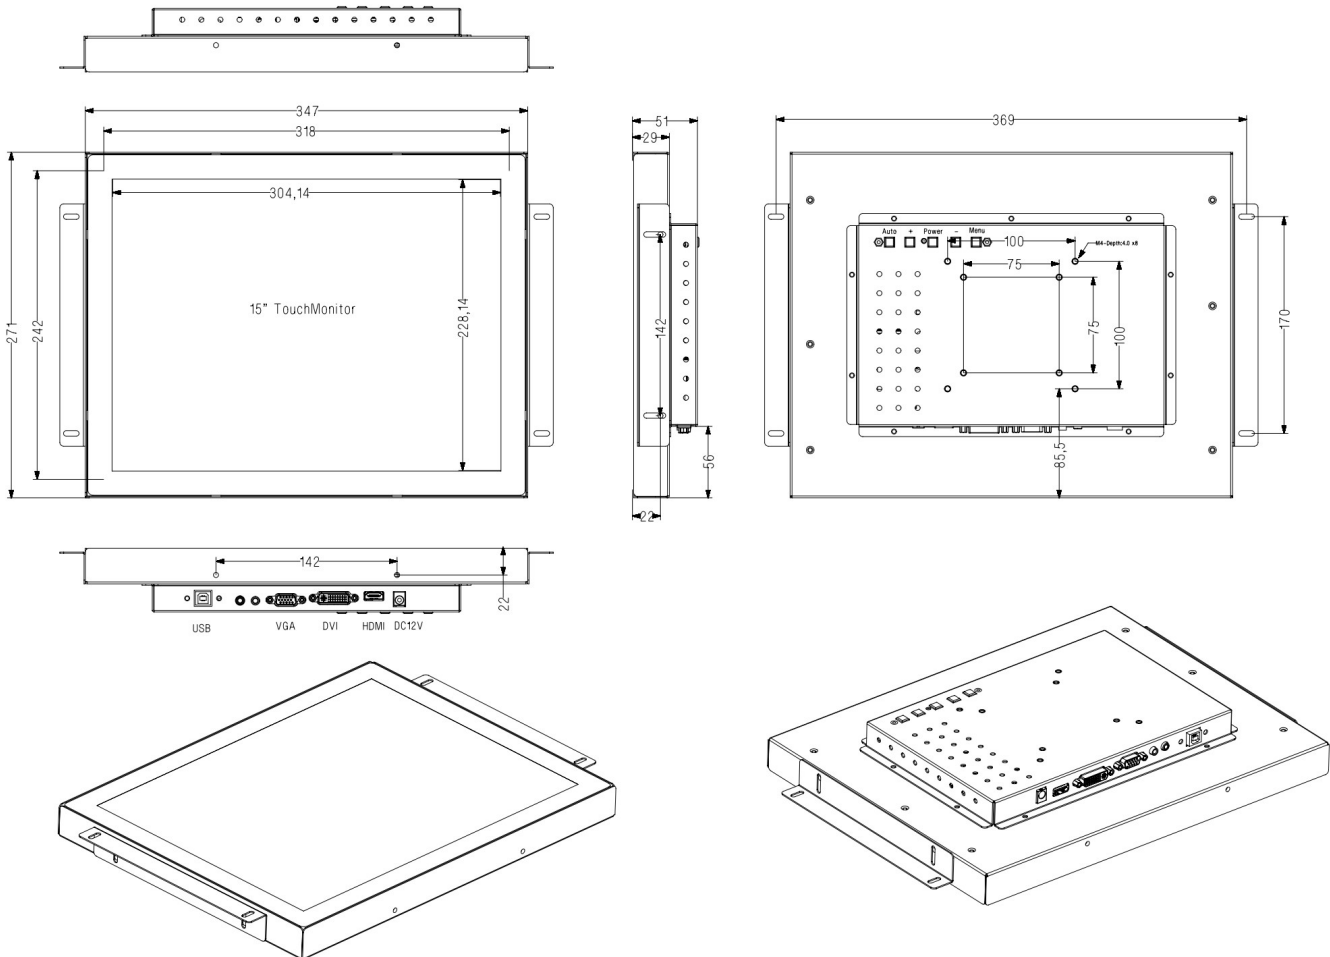

COT150-CBF03-PSEL3 -ASM-D02
2022-08-01