


SKT-215-CBK03-PSEL3

21.5" Industrial Open-Frame Touch Monitor

Brightness 300cd/m2, Resolution 1920*1080, VGA/DVI/HDMI, USB Touch, 12V DC

Antiglare 5mm vandal proof tempered over glass + 1.3mm Projected Capacitive touch sensor

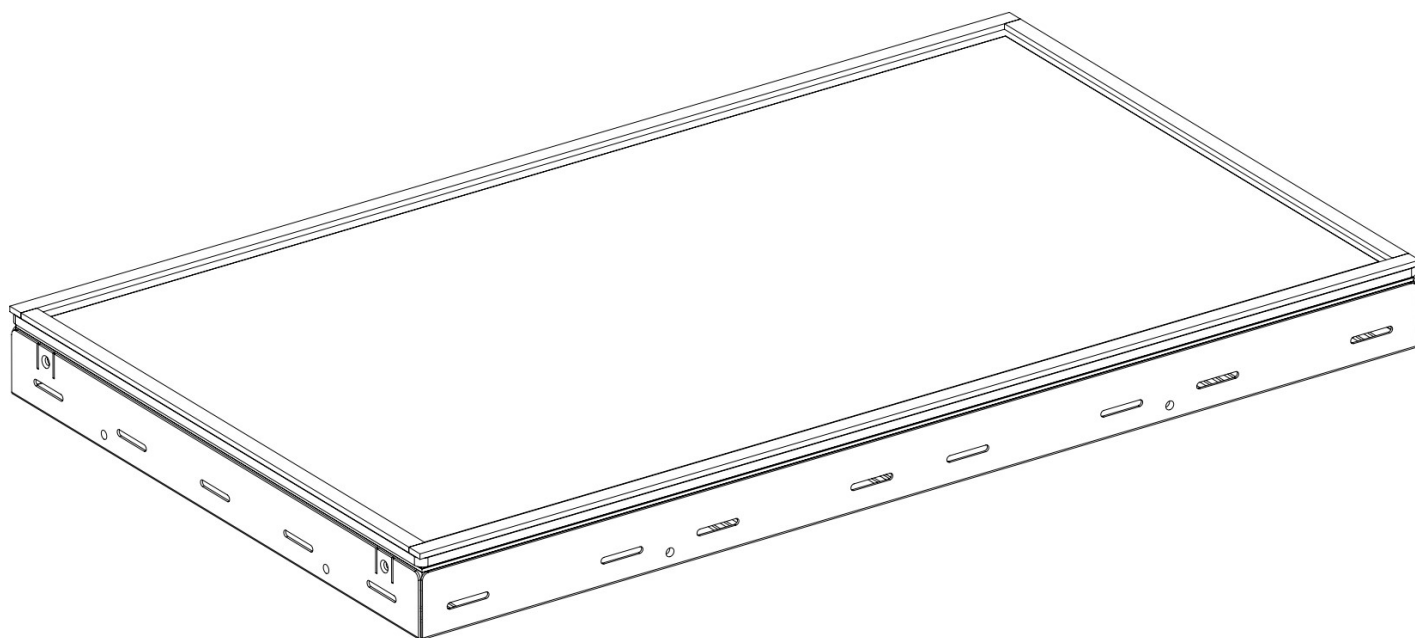

Seleniko

PUBLISHED DATE:2022-07-8

Specification

Model Number	SKT-215-CBK03-PSEL3	
Total parameter	Diagonal Size	21.5 inch a-Si TFT-LCD, LCM
	Aspect Ratio	16:9
	Enclosure Color	Black
	Video Input	VGA/DVI/HDMI
	Speakers	Optional
Mechanical	Monitor Dimensions	500x295.5x62.8mm
	VESA Holes (mm)	75x75, 100x100
LCD Panel	Active Area(mm)	477.6(H)×269.1(V) mm
	Resolution	1920(RGB)×1080 [FHD]
	Dot Pitch(mm)	0.098×0.294 mm
	Viewing angle(Typ.)(CR≥10)	89/89/89/89 (Typ.)(CR≥10)
	Contrast (Typ.) (TM)	1000:1 (Typ.) (TM)
	Brightness (typical)	LCD Panel: 350 nits
		PCAP: 300 nits
	Response Time (Typ.)(Tr/Td)	13/5 (Typ.)(Tr/Td)
	Support Color	16.7M , 72% (CIE1931)
	Backlight MTBF(hr)	WLED [15S4P] , 30K hours
Touchscreen	Touch Technology	PCAP Touch, Capacitive Touch Screen, Antiglare
	Input Methods	Finger
		Gloved hand
		Passive stylus
	Number of Touches	Multi Touch (10)
	Glass Thickness	5 mm Tempered Glass Cover
		1.3mm Included Touch sensor Tesamol rubber, 8 mm width, 2 - 2,5 mm thick
	Light Transmission	90%
	Response Time	8 ms
	Life Span	Over 50 million touches in one location
	Positional Accuracy	± 1.5mm
	Touch interface	USB
		RS232(Optional)
	Operating System	Windows XP
		Windows 7
		Windows 8
		Linux
		Android
Power	Power Consumption (W)	DC 12V /4A ,DC head 5.5x2.1MM
	Input Voltage	100-240 VAC, 50-60 Hz
	MTBF	50000 hr at 25°C
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Operating RH:	20%~80%
	Storage RH:	10%~90%
Accessories	Packing List	1 x Touch Monitor
		1 x Power Switching Adapter
		1 x Power Cable

		1 x USB Cable
		1 x HDMI Cable
		Rear Mount brackets
Warranty	Warranty Period	1 Year Free Warranty
	Technical Support	Lifetime

Drawing

