


SKT-270H-CFK03 5mm AG

27 Inch Open-Frame LCD Touch Monitor

Brightness 300cd/m2, Resolution 1920*1080, VGA/DVI/HDMI, USB Touch, 12V DC

Projected Capacitive Touch Panel 5mm tempered Glass Cover with Anti Glare

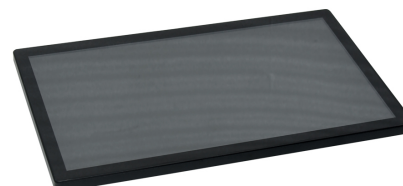

Seleniko

PUBLISHED DATE:2023-1-27

Specification

Model Number	SKT-270H-CFK03 5mm AG	
Total parameter	Diagonal Size	27.0 inch a-Si TFT-LCD, LCM
	Aspect Ratio	16:9
	Enclosure Color	Black
	Video Input	VGA/DVI/HDMI
Mechanical	Monitor Dimensions	644.2x393.4x44.9mm
	VESA Holes (mm)	75x75,100x100
LCD Panel	Active Area(mm)	376.32(H)×301.056(V)
	Resolution	1920(RGB)×1080 [FHD]
	Dot Pitch(mm)	0.10375×0.31125 mm
	Viewing angle(Typ.)(CR≥10)	89/89/89/89 (Typ.)(CR≥10)
	Contrast (Typ.) (TM)	3000:1 (Typ.) (TM)
	Brightness (typical)	LCD Panel: 300 cd/m ² PCAP: 270 cd/m ²
	Response Time (Typ.)(Tr/Td)	7/5 (Typ.)(Tr/Td)
	Support Color	16.7M , 72% (CIE1931)
	Backlight MTBF(hr)	WLED , 30K hours
Touchscreen	Touch Technology	PCAP Touch, Capacitive Touch Screen
	Input Methods	Finger
		Gloved hand
		Passive stylus
	Number of Touches	Multi Touch (10)
	Glass Thickness	5mm Tempered Glass, Anti Glare
	Light Transmission	90%
	Response Time	8 ms
	Life Span	Over 50 million touches in one location
	Positional Accuracy	± 1.5mm
	Touch interface	USB
		RS232(Optional)
	Operating System	Windows XP,Windows 7,Windows 10, Linux, Android
Power	Power Consumption (W)	DC 12V /4A ,DC head 5.0x2.5MM
	Input Voltage	100-240 VAC, 50-60 Hz
	MTBF	50000 hr at 25°C
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Operating RH:	20%~80%
	Storage RH:	10%~90%
Accessories	Packing List	1 x Touch Monitor 1 x Power Switching Adapter 1 x Power Cable 1 x USB Cable 1 x HDMI Cable

		Rear Mount brackets
Warranty	Warranty Period	1 Year Free Warranty
	Technical Support	Lifetime

Drawing

